

Water Leak Detector

WLD Panel



ANISO9001: 2008 COMPANY-

Features

- Zones available 2,4,6,8
- Operates on 230 VAC Supply
- 20 X 4 LCD Alphanumeric display
- Relay Output for Alarm, Fault ,Hooter.
- Tampering protection
- LED's for zone status, mains and battery status.
- Eco & Budget Friendly (single battery).
- Panel Dimensions 350mm X 250mm X 100mm

Optional Features

- Modbus over RS-485
- Relay Board (Zone wise)
- Battery backup
- Event Log
- Alphanumeric Key Pad



TECHNICAL SPECIFICATIONS

Supply

Supply Voltage: 230VAC $\pm$ 10 % 50 Hz.
Power consumption: 8Watts (Standby).

Battery

Inbuilt trickle charging.
Lead acid battery 12V -7Ah Charging Voltage: 15.9 VDC.

Zones input

AC signal through sensor cable: 10Vpp @ 40 KHz.
Sensor cable length: 5mtrs to 100mtrs per zone.

Notification Appliance Circuits

Operating Nominal Voltage: 12 VDC
Operating Current: 0.25A (Max)

Relay Rating

Alarm Contact (C, NO): 125VAC@ 1A / 30VDC@ 2A
Fault Contact (C, NO): 125VAC@ 1A / 30VDC@ 2A
NAC Contact (C, NO): 125VAC@ 1A / 30VDC@ 2A

☎ 022 41205036 / 022 25003210 | CEO: Joseph Rozario: 9930533861

✉ sales@pcdfire.co.in info@linovate.in 🌐 www.pcdfire.co.in

Head Office - Ground Floor, C-15 Kailash Esplanade, L.B.S. Marg, Ghatkopar (w), Mumbai 400086

Works - Ghatkopar Industrial Estate, B/h R-City Mall, L.B.S. Marg, Ghatkopar (w), Mumbai 400086

Water Leak Detector

WLD Panel




ANISO9001: 2008COMPANY-

Dimension: 350 x 250 x 100 mm


Mounting Details

All dimensions in mm.

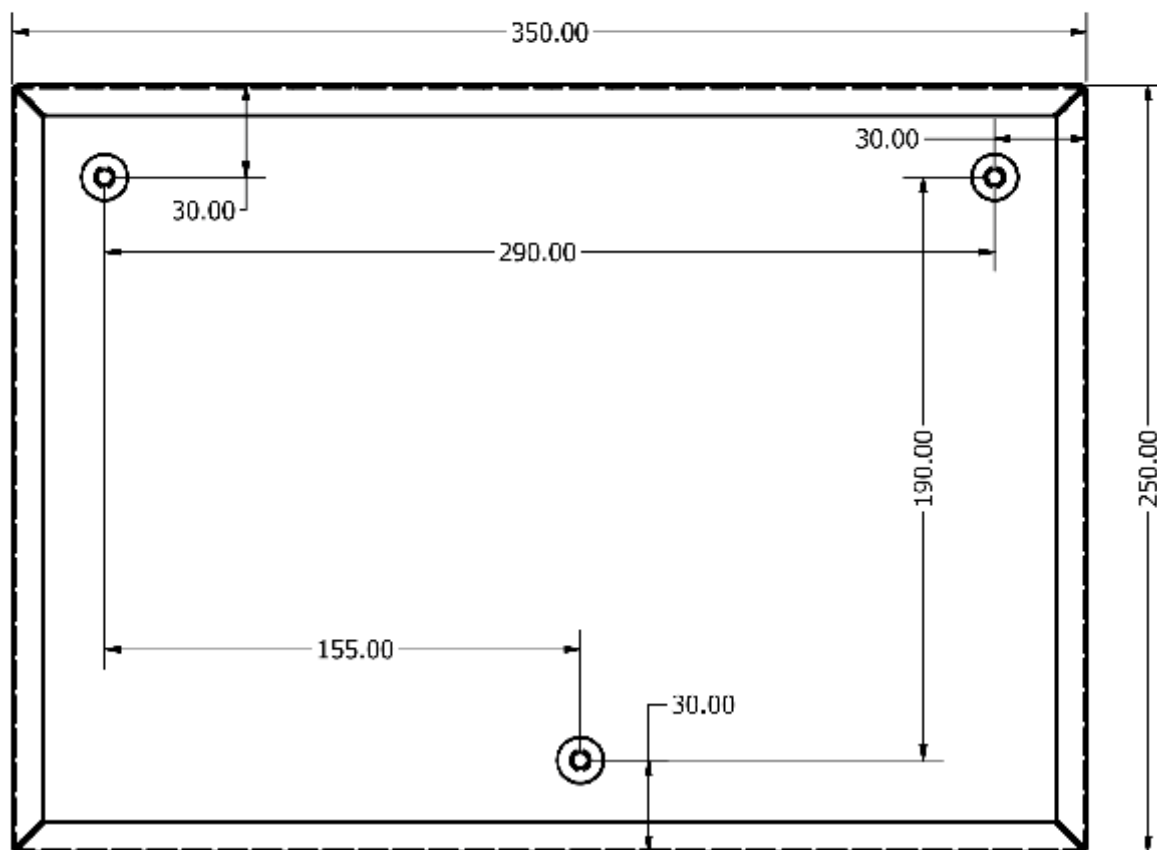

STAR ELECTRONIC CONCEPTS

CONNECTION DETAILS

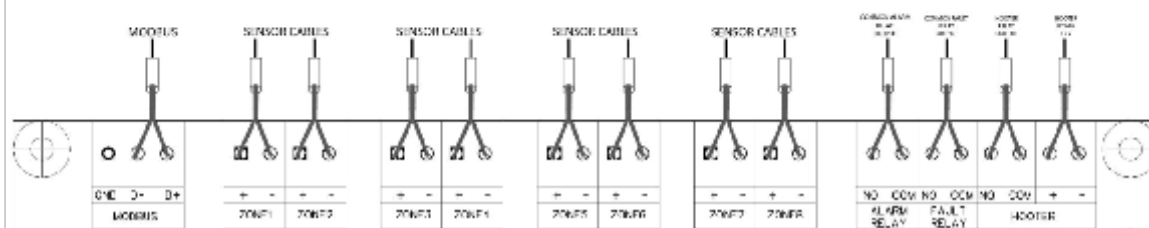

📞 022 41205036 / 022 25003210 | CEO: Joseph Rozario: 9930533861

 sales@pcdfire.co.in info@linovate.in www.pcdfire.co.in

Head Office - Ground Floor, C-15 Kailash Esplanade, L.B.S. Marg, Ghatkopar (w), Mumbai 400086

Works - Ghatkopar Industrial Estate, B/h R-City Mall, L.B.S. Marg, Ghatkopar (w), Mumbai 400086