

Fire Alarm Accessories

Manual Call Point

(Conventional MCP)

Model: MC-AB-RD2



ANISO9001: 2008COMPANY-

Manual Call Points in ABS, for indoors also available in other colors as per international standards depending on requirements.

All MCPs are made with the highest Quality components, PCBare Glass epoxy

TERMINATIONS

RED = Positive BLACK = Negative

Indications : LED (ON when operated)

MODELS

MC-AB-RD2 : Red - Manual call point

MR-AB-RD2 : Red - Manual Gas release.

SG-AB-YD2 : Yellow –Abort Switch for Gas release.

ED-AB-GD2 : Green – Emergency Door Open for Access control



MC-AB-RD2

SPECIFICATIONS

Operating voltage : 9 - 35v

Current in Normal state : 0 mA.

Current in operated state: 50 mA@ 24v DC.


Material : ABS.

Break Glass : Lift flap, Press and push down to break
and Resettable with Key.

Options : Yellow, Green, Blue & White.
(For large orders. 100 Plus)



Wiring For Conventional Manual Call Points

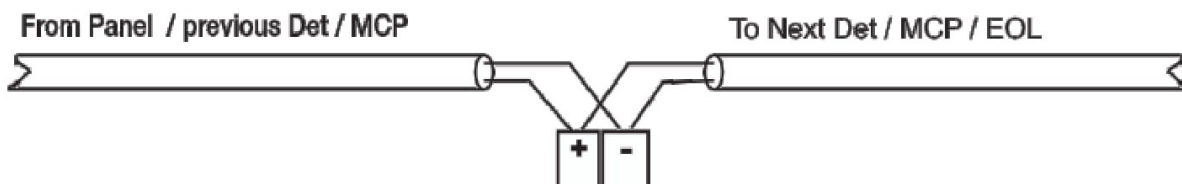

WWW.PCDFIRE.COM - Please Visit Our Website for Other Product Information

022 41205036 | 022 250003210 | 9930533861 | 9920520573 | 9987665570

sales@pcdfire.com | joseph@pcdfire.com | crispin@pcdfire.com

Head Office: Office No E1-110, Kailash Esplanade, LBS Marg, Ghatkopar West, Mumbai – 400 086
Works: Ghatkopar Industrial Estate, B/h R-City Mall, LBS Marg, Ghatkopar West, Mumbai – 400 086

LINOVATE TECHNOLOGIES : Authorized Channel Partners For Pan India & OEM for PCD make Fire Alarm Systems

Pg 1/1