## Fire Alarm Panel
# Repeater Panel
## Model No:-CD 32-32z RPT

**PCD**
**PCD LINOVATE GLOBAL**
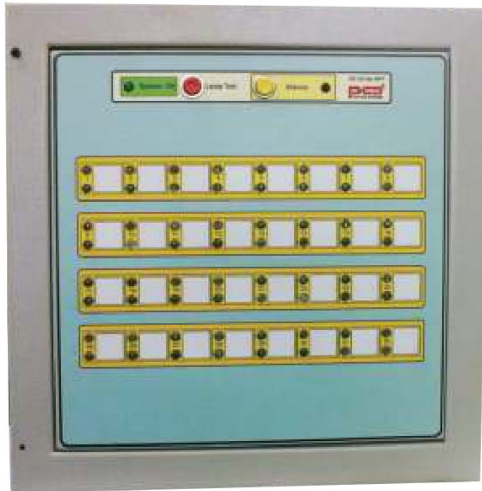(FORMERLY PCD FIRE SYSTEMS)

ANISO9001: 2008COMPANY-

### MODEL NO
CD 32-32z RPT

### INTRODUCTION
The Addressable Repeater is a Microprocessor based Repeater to be used with Model CD 32 Repeater. This Panel Consists of the following Components.

### FEATURE
Location message and LED's as programmed in the main panel will display alarm indication on the LED display.

Silence key is Provided to Silence the Repeater Audio alarm.

### SPECIFICATION
Panel Supply:-24V DC

Repeater :-4 wire shield , RS 485 and Power.

### REPEATER MODEL NO
CD 32-8z RPT / CD 32-16z RPT
CD 32-32z RPT / CD 32-48z RPT

### PANEL SIZE
400mmx400mmx120mm

### FUNCTION
Scroll up key work only the next alarm message on LCD. Scroll Down key work only the previous alarm message on LCD. SilenceAudio alarm repeater panels forAlarm. Alarm will restart if new alarm is detected Silence LED will become on in LCDdisplays Silence Message.

### LCD PANEL SPECIFICATION
Panel Supply:-24V DC
Repeater :-4 wire shield , RS 485 and Power.

### LCD OPERATION
Check the key operation. As given in the LCD & key operation section.

Put the communications commands & check the reply on theRS485/RS232 communication with the PC & observation theproper message on LCD.

### NORMAL OPERATION
In case of event related to master controller. Operation action, master executed function or fault.

**Model No:-AL04-Rep**

### PANEL SIZE
400MMX200MMX120MM